




VALUE
functional bathroom
solutions

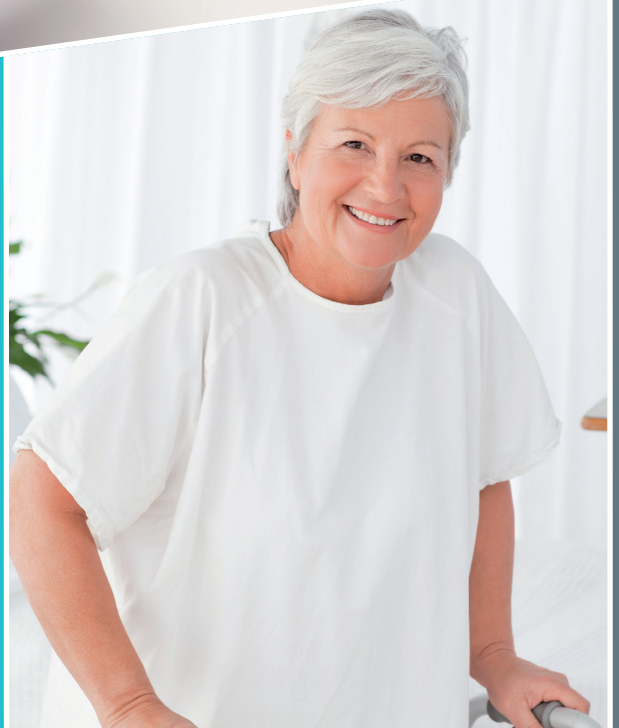

VALUE

Functional solutions for easy living.

The VALUE series provides a pleasant and safe environment for people who need extra help with their daily routines in the bathroom, while also assisting helpers and carers.

- ▮ All the products are made of materials which are robust and resistant to cleaning agents as well as to moisture and high humidity levels.
- ▮ The design of the products takes account of current ergonomic and hygiene requirements while ensuring high standards of user comfort.
- ▮ The designs are thoroughly tested and solid, and will withstand many years of daily use.

Respect and the right of the individual to a good life in spite of disability forms the cornerstone of the Pressalit philosophy, as summarised by the following words:

keep living

Contents

Wash basin brackets, wash basins and tap	Page	4
Support arms	Page	6
Toilet seats	Page	8
Toilets	Page	10
Folding shower seats	Page	11
Handrails	Page	12
Dimensioned drawings	Page	14
Mounting and accessories	Page	15

Wash basin brackets, wash basins and tap




The height-adjustable wash brackets are suitable for many situations, e.g. nursing homes and schools. The numerous adjustment options encourage users to help themselves as well as improving working conditions for helpers and carers.

The shape and size of the wash basin ensures that both seated and standing users can use the tap and get close to the jet of water.

The tap on the wash basin must be easy, comfortable and logical to use – regardless of whether you are sitting or standing.



The ergonomic wash basin has rounded edges, which are comfortable to hold and rest against.



The wash basin has a raised edge, preventing water from running over the back of the wash basin.



The wash basin is relatively flat, making it possible for a wheelchair user to manoeuvre right under it and get comfortably close to the tap.



Ergonomic wash basin

R2052
R2053

MATRIX New Curve wash basin with overflow
MATRIX New Curve wash basin without overflow

Materials: Crushed marble with a high-gloss, non-porous sanitation coating

The concave front edge stabilises standing as well as seated users. The wash basin slopes down to the front, offering ergonomically correct support for the elbows.

For seated users, the flat bottom of the wash basin allows room for the user's legs underneath the wash basin.

Tap hole: Ø 36 mm.

For placement of plumbing installations, see page 15.



Ergonomic wash basin

◀ **R2050**
R2051

MATRIX Curve wash basin with overflow
MATRIX Curve wash basin without overflow

Materials: Ceramics

The concave front edge stabilises standing as well as seated users. The rounded edges are also comfortable to hold and rest against.

For seated users, the design of the corners leaves space and supports the elbows in the basin, while the flat bottom allows room for the user's legs underneath the wash basin.

Tap hole: Ø 35 mm.

For placement of plumbing installations, see page 15.



Height-adjustable wash basin bracket - gas

R1210000

Height-adjustable, 320 mm

Gas lift height adjustment is suitable when the height needs to be changed frequently for different users. For easy daily adjustment by carers.



Height-adjustable wash basin bracket - manual

R1214000

Height-adjustable, 150 mm

Manual height adjustment is suitable when the height of the wash basin only needs adjusting once in a while. For adjustment by maintenance worker.



Wash basin tap

RT622

Tap with long rotatable spout

The ring-shaped operating lever is suitable for disabled users. The long rotatable spout makes it easier for seated users to reach the water as the spout can always be pushed to one side if it is in the way.

The symbols for hot and cold water are visible to both seated and standing users. Scald protection prevents unintended water temperatures above 40°C.

Integrated water-saving function for high and low flow rates. The lever is spring-loaded, which prevents splashing and using excessive water unintentionally.

VA-approved (Denmark).

Support arms



The different types of support arms ensure a greater sense of security for both the independent user and the carer.

The support arms are manufactured with a Rilsan®-coated surface which is comfortable to hold, easy to clean and protects against rust.

The support arms are supplied as fixed or height-adjustable models, and can be folded away when not in use.



The ergonomic design gives a secure and comfortable grip as well as a good sense of where the support arm ends.

Materials: Rilsan®-coated steel, pressure-cast aluminium, plastic



Support arms for mounting on toilet

- ◀ **R1170000** With toilet seat R37
- R1171000** Without toilet seat

Can be mounted easily and quickly on the toilet.
The padded handles are comfortable for hands and arms.
The support arms can be folded individually.
Supplied with hinges BL1999.

Only recommended for use with the following toilet seats: R26, R27, R28, R29, R30, R36, R37 or R38.


The support arms are suitable for people who need to be supported slightly when using the toilet. For people transferring from a wheelchair to the toilet, wall-mounted support arms are recommended.



Support arm, height-adjustable

R1110000 Height-adjustable, 150 mm

Length: 850 mm
Projection when folded: 200 mm
Max. load: 120 kg
Mounting kit for masonry walls included.



Support arm, height-adjustable – with leg

R1111000 With leg, height-adjustable, 145 mm

Length: 850 mm
Projection when folded: 155 mm
Max. load: 135 kg
Mounting kit for masonry walls included.



Support arm, height-adjustable – on free-standing floor column

R1161000 Height-adjustable, 670 mm

Length: 850 mm
Max. load: 120 kg
Mounting kit for floors included.

Suitable if:

- the wall is unstable
- the distance between the wall and the toilet is more than 700 mm
- wall mounting is not possible for any other reason.



Support arm

R1100000 Support arm

Length: 850 mm
Projection when folded: 185 mm
Max. load: 120 kg
Mounting kit for masonry walls included.



Support arm with leg

R1101000 Height: 850 mm
R1102000 Height: 800 mm

Length: 850 mm
Projection when folded: 140 mm
Max. load: 135 kg
Mounting kit for masonry walls included.

Toilet seats



People are built differently. Sizes and shapes vary – bottoms included. Toilet seats from Pressalit Care take these differences into account. Therefore, we also supply raised and slanted models.

All toilet seat models match most toilets.

Pressalit Care's ergonomic seats are both functional and attractively designed.

They are made of high-quality thermoset plastic which makes them extremely durable and easy to clean.

The solid stainless steel hinges ensure a sense of security and stability.



To further increase stability, we recommend mounting Dania and Colani with institutional hinges with crossbar BV2999/BV3999, e.g. for sideways transfers from wheelchairs.



Stabilising buffers ensure that the seat sits very securely on the toilet bowl, even with sideways pressure. The stabilising buffers can be adjusted to be in contact with the inside or outside of the bowl, depending on its shape.



Hard-wearing and easy-to-clean hinges.

Materials: Thermoset plastic, stainless steel
Max. load: Seats: 250 kg
Raised seats: 150 kg



Dania

R27xxx
R37xxx
R28000
R38000

without cover, with hinges
with cover, with hinges
without cover, open front, with hinges
with cover, open front, with hinges

An anatomically well-designed seat which is suitable for most people. Sideways transfer is easy as the seat is relatively flat. The cover is comfortable to sit on, and when raised provides good back support.

Dania is also available in a version with an open front, which makes it suitable for using as a bidet with easy access for a hand shower.

Supplied with universal hinge B82/B83 as standard. Can also be supplied with institutional hinges D92.

○ 000: White ● 035: Red
● 012: Anthracite gray ● 108: Dark blue



Ergosit

R29000
◀ **R30000**

without cover, with hinges
with cover and hinges

Large, wide sitting surface with good support. Especially well-suited for "large" adults with digestive problems.

The bowels are stimulated by the seat's contoured surface that presses and acts on the thigh muscles and nerves. Grooves at the back prevent the user's bottom from sticking to the seat.

Supplied with institutional hinges D92 as standard.
Also available with anti-theft and vandal-proof hinges BZ7.



Colani

R26000
◀ **R36000**

without cover, with hinges
with cover and hinges

The curved bowl shape supports and stabilises the pelvic region and also makes the seat well-suited for children (aged 6+ years) with muscular atrophy.

The raised side edges are easy to hold when the body needs to be stabilised. The cover is comfortable to sit on, and when raised provides good back support.

Supplied with universal hinge B82/B83 as standard. Also available with institutional hinges D92 or anti-theft and vandal-proof BZ7 hinges.



Toilet seats, 50 mm raised

◀ **R21000** Dania, 50 mm, open front, without cover
R31000 Dania, 50 mm, open front, with cover
R23000 Dania, 50 mm, without cover
R33000 Dania, 50 mm, with cover
R43000 Dania, 50 mm, with cover, with splash guard
R19000 Ergosit, 50 mm, without cover
R20000 Ergosit, 50 mm, with cover

Supplied with special hinges.

Dania R43000 is supplied with a splash guard.



Toilet seats, 100 mm raised

R22000 Dania, 100 mm, open front, without cover
R32000 Dania, 100 mm, open front, with cover
R24000 Dania, 100 mm, without cover
◀ **R34000** Dania, 100 mm, with cover

Supplied with special hinges.

Dania 100 mm is supplied with a splash guard T9515.



Toilet seat, 50/100 mm slanted

R35000 Dania, 50/100 mm, slanted with cover,
with splash guard

Supplied with special hinges.

Dania 50/100 mm is supplied with a splash guard T9515.

Toilets



The height and the shape of the toilet have a key bearing on whether the user sits securely on the toilet.

A standard height toilet can be difficult to sit down on and get up from for many people. A high toilet could be an alternative choice, or a wall-hung toilet that can be installed at a height to suit the user.



Toilet, wall-hung

- ◀ **R2099000** Toilet, 700 mm
- R2091000** Toilet, 540 mm

A 700 mm wall-hung toilet is recommended for wheelchair users. An extra long bowl also allows more space for the carer.

Material: Porcelain

A wall-hung toilet makes it possible to mount the toilet at whichever height is required.

A wall-hung toilet also allows space for a wheelchair's foot supports, the legs of a mobile hoist and the carer's feet, as well as facilitating cleaning of the floor.



Toilet, floor model

- R2097000** Toilet, high model, S-trap

Bowl height without toilet seat: 460 mm

Supplied with dual flush, pre-set to 3/6 litres
Can be re-set to 2/4 litres.

Folding shower seats

DIMENSIONS
ACCESSORIES
MOUNTING

P. 14-15



For some users, being able to sit while showering is a matter of safety. These shower seats are designed for installation in the shower area and can be easily folded up or down according to need.

The seats and backs can easily be removed for cleaning.

The folding shower seat is designed so that the water runs off it.

The wall bracket and leg are made of Rilsan®-coated stainless steel for extra strength. The Rilsan®-coated steel effectively protects against rust, is pleasant to hold and is easy to clean.



Backrest for folding shower seat

R1651000 Backrest

Materials: Stainless steel, Rilsan®-coated steel, plastic



Folding shower seats

R1600000 Seat

Projection when folded: 197 mm

Max. load: 125 kg




Folding shower seat with leg

R1602000 Seat

Projection when folded: 250 mm

Max. load: 125 kg

Handrails

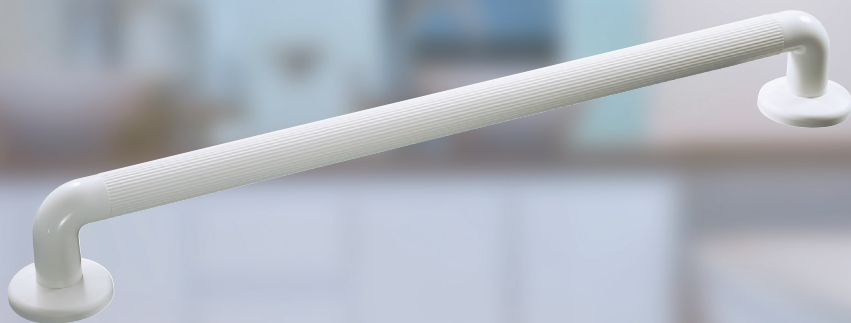

Pressalit Care's ABS plastic handrail system provides a secure handhold in any situation and can be used in both the bathroom and other places where support is required. The handrails can be combined and assembled to suit the individual user.


The handrails are made from solid colour ABS plastic tubing so scratches and ordinary wear cannot be seen.

The handrails are 32 mm in diameter so they can be held comfortably and firmly.

Keeping a distance of 52 mm away from the wall, the handrail is easy to firmly grab and hold.




Once the rosettes have been mounted, the rosette covers click into place, concealing the screws.




The handrail has an easy-to-grip, grooved surface.

- Material:** ABS plastic
Max. load: For spans up to 600 mm: 100 kg
Colours: ○ 000: White
 ● 108: Dark blue

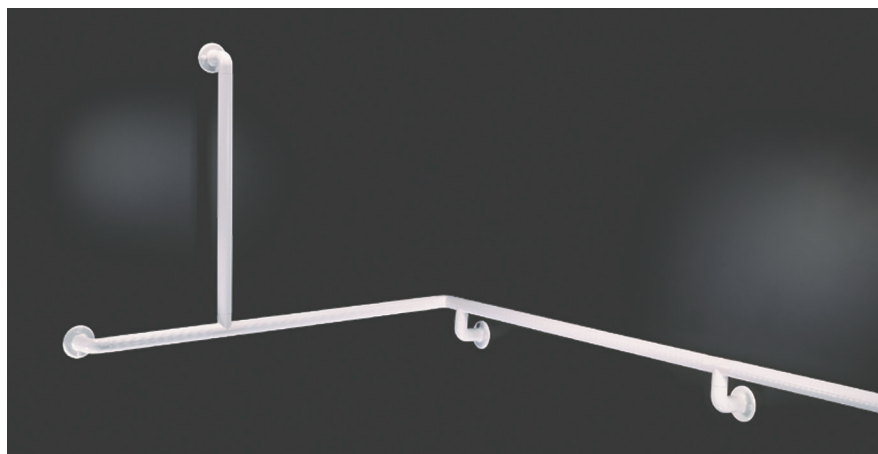


The ABS plastic handrails can be assembled in countless combinations and matched to the desired dimensions.



Handrail with wall rosette covers

R1351xxx	153 mm
R1352xxx	306 mm
R1353xxx	459 mm
R1354xxx	612 mm
R1451000	153 mm. In retail packaging, including fixing screws and plugs
R1452000	306 mm. In retail packaging, including fixing screws and plugs
R1453000	459 mm. In retail packaging, including fixing screws and plugs
R1454000	612 mm. In retail packaging, including fixing screws and plugs



Handrail, angled

R1364xxx	Right, 90°, 600 x 600 mm
R1374xxx	Left, 90°, 600 x 600 mm



Rail sections

R1315xxx	81 mm
R1314xxx	234 mm
R1313xxx	387 mm
R1312xxx	540 mm

The rail sections can be supplied in special lengths up to max. 612 mm and extended using T-sections.



Fittings

R1320xxx	Wall rosette with T-section and joining plug*
R1321xxx	Wall rosette with 90° angle and joining plug*
R1324xxx	Wall rosette with 90° angle and joining plug incl. cover
R1325000	Joining plug
R1345xxx	90° angle without joining plug

*) Supplied without cover


Handrail assembly

The tubular handrail sections and fittings must be glued together with ABS adhesive. Pressalit Care recommends Cyanolit (Pressalit Care no. T4654).


Dimensioned drawings

Wash basin brackets

R1210




R1214




Wash basin - tap


R2050
R2051






R2052
R2053



RT622




Toilets




R2097

Folding shower seats


R1651




R1602




Support arms



R1100




R1110




R1101

H: 850 mm




R1111

H: 800 mm




R1161




R1170
R1171

Toilet seats



R27
R37
R28
R38




R29
R30





R26
R36




R35




R21
R31
R23
R33
R43
R19
R20



R22
R32
R24
R34




Handrails



R1351
R1352
R1353
R1354

R1451
R1452
R1453
R1454



R1320

R1321


R1324



R1325



R1345




R1364
R1374

Mounting and accessories

Flexible feed and waste systems

Height-adjustable wash basin brackets require flexible feed and waste systems. It is important that the plumbing installations are correctly positioned. Detailed mounting instructions are obviously supplied with the individual products but can also be requested separately, for example for planning purposes.

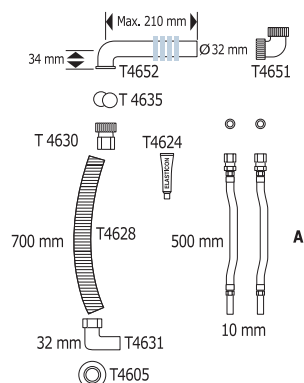

Flexible feed/waste system

R2061 3/8"/500 mm

Feed and waste pipes are VA-approved (Denmark).


R2071 1/2"/500 mm (primarily UK)

Feed/waste pipes can be supplied in other lengths. The recommended installation height takes wheelchair foot supports into account.



R2061: A = T4604 R2071: A = T4610

Flexible feed and waste systems can be supplemented with water traps R2076 and air relief kit R2059. Pressalit Care recommends that feed and waste wall connections are at 90° angles, pointing downwards.

Positioning of feed and waste system





Mounting instructions re toilet seats and fittings



A position



B position




Accessories

R1151




Paper holder with spring for support arm. For all models except R1170 and R1171.

R1175



Paper holder for R1170 and R1171. Can be mounted on the left or right.

R1152




Front rails for support arms.

B82P999 B83P999



Universal hinge. Standard with Dania and Colani. Stainless steel.

D92999



Institutional hinge: Hinge with crossbar. Mounted where extra strength and stability is required. Standard with Ergosit. Recommended with Dania and Colani. Stainless steel.

B82: 100 mm bolt, for the Nordic markets.
B83: 75 mm bolt, for all markets except the Nordic markets.

T9515



Splash guard, 100 mm.


T9516



Splash guard, 50 mm.


Splash guards: Matt, transparent plastic. Easy to remove, e.g. for cleaning and replacement.

R2076



Water trap. For flexible waste system.

R2059



Air relief kit.

PRESSALIT[®] CARE

Reduced functionality need not limit a person's development. For more than 35 years, the keep living philosophy has been a guiding principle for Pressalit Care's development of flexible kitchen and bathroom solutions for people with disabilities.

Thanks to its research-based knowledge, Pressalit Care is market-leading within specialist kitchen and bathroom solutions and today provides consultancy to customers worldwide.

An underlying respect for the individual and his or her possibilities is also reflected in the company's relationship to society at large and the local community. At Pressalit, Corporate Social Responsibility (CSR) is deeply rooted in the company's strategy and values and provides an important lodestar for all parts of the organisation.

Pressalit Care is headquartered in Denmark.

www.pressalit.com

Pressalit A/S

Pressalitvej 1
8680 Ry
Denmark
Tel.: +45 8788 8788
Fax: +45 8788 8789
E-mail: pressalit@pressalit.com

UK Sales - Pressalit Care plc

100 Longwater Avenue
Green Park
Reading
RG2 6GP
United Kingdom
Tel.: 0844 880 6950
Fax: 0844 880 6951
E-mail: uk@pressalit.com

International Sales Department

Pressalitvej 1
8680 Ry
Denmark
Tel.: +45 8788 8777
Fax: +45 8788 8669
E-mail: sales@pressalit.com

